


Болт DIN603 с полусферической головкой и квадратным подголовником

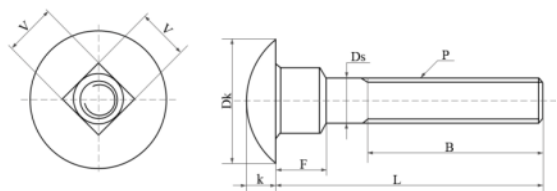

Материал: сталь 1010,
класс прочности 5.8
Головка: полусферическая
с квадратным подголовником
Резьба: метрическая, полная,
средний класс точности
Покрывтие: белый цинк

Размер	B, мм	F, мм	Dk, мм	Ds, мм	K, мм	P, шаг резьбы, мм	V, мм
M5 x 16	16,0	3,5	13,0	5,0	3,0	0,8	4,52 - 5,48
M5 x 20	16,0	3,5	13,0	5,0	3,0	0,8	4,52 - 5,48
M5 x 25	16,0	3,5	13,0	5,0	3,0	0,8	4,52 - 5,48
M5 x 30	16,0	3,5	13,0	5,0	3,0	0,8	4,52 - 5,48
M5 x 35	16,0	3,5	13,0	5,0	3,0	0,8	4,52 - 5,48
M5 x 40	16,0	3,5	13,0	5,0	3,0	0,8	4,52 - 5,48
M5 x 50	16,0	3,5	13,0	5,0	3,0	0,8	4,52 - 5,48
M5 x 60	16,0	3,5	13,0	5,0	3,0	0,8	4,52 - 5,48
M5 x 70	16,0	3,5	13,0	5,0	3,0	0,8	4,52 - 5,48
M5 x 80	16,0	3,5	13,0	5,0	3,0	0,8	4,52 - 5,48
Размер	B, мм	F, мм	Dk, мм	Ds, мм	K, мм	P, шаг резьбы, мм	V, мм
M6 x 16	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 20	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 25	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 30	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 35	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 40	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 45	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 50	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 60	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 70	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 80	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 90	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 100	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 110	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 120	18,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 130	24,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 140	24,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48
M6 x 150	24,0	4,0	16,0	6,0	3,5	1,0	5,52 - 6,48

Болт DIN603 с полусферической головкой и квадратным подголовником

Размер	B, мм	F, мм	Dk, мм	Ds, мм	K, мм	P, шаг резьбы, мм	V, мм
M8 x 20	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 25	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 30	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 35	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 40	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 45	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 50	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 60	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 70	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 80	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 90	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 100	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 110	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 120	22,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 130	28,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 140	28,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
M8 x 150	28,0	5,0	20,0	8,0	4,5	1,25	7,42 - 8,58
Размер	B, мм	F, мм	Dk, мм	Ds, мм	K, мм	P, шаг резьбы, мм	V, мм
M10 x 20	26,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 30	26,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 40	26,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 50	26,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 60	26,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 70	26,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 80	26,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 90	26,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 100	26,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 120	26,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 110	26,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 120	26,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 130	32,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 140	32,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 150	32,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 160	32,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 180	32,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58
M10 x 200	32,0	6,0	24,0	10,0	5,0	1,5	9,42 - 10,58

Болт DIN603 с полусферической головкой и квадратным подголовником

Размер	B, мм	F, мм	Dk, мм	Ds, мм	K, мм	P, шаг резьбы, мм	V, мм
M12 x 30	30,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 40	30,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 50	30,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 60	30,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 70	30,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 80	30,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 90	30,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 100	30,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 120	30,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 130	36,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 140	36,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 150	36,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 160	36,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 180	36,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7
M12 x 200	36,0	8,0	30,0	12,0	6,5	1,75	11,3 - 12,7